





Fluidics Instruments BV




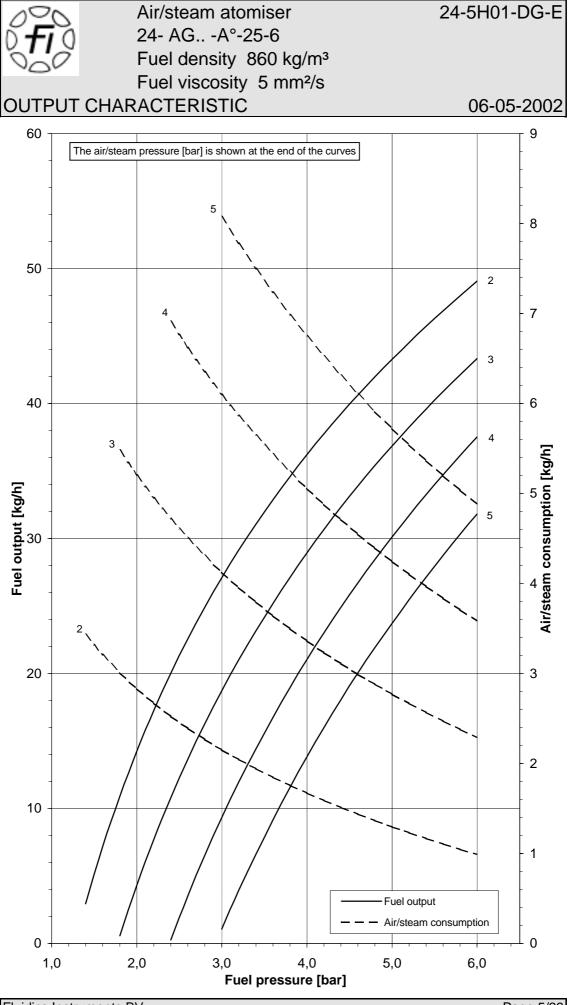

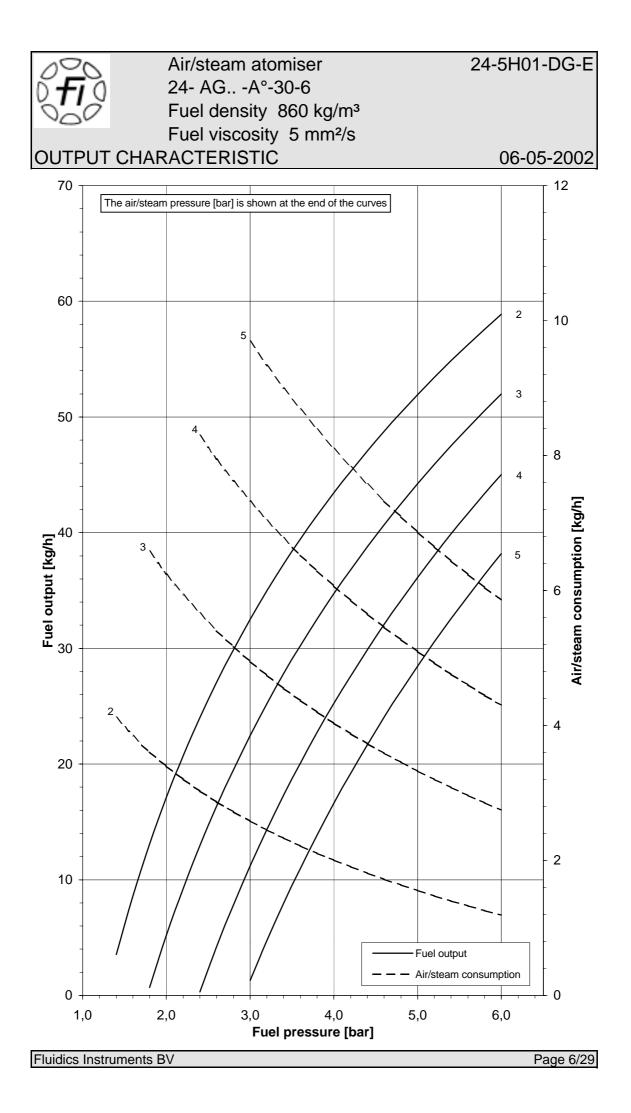

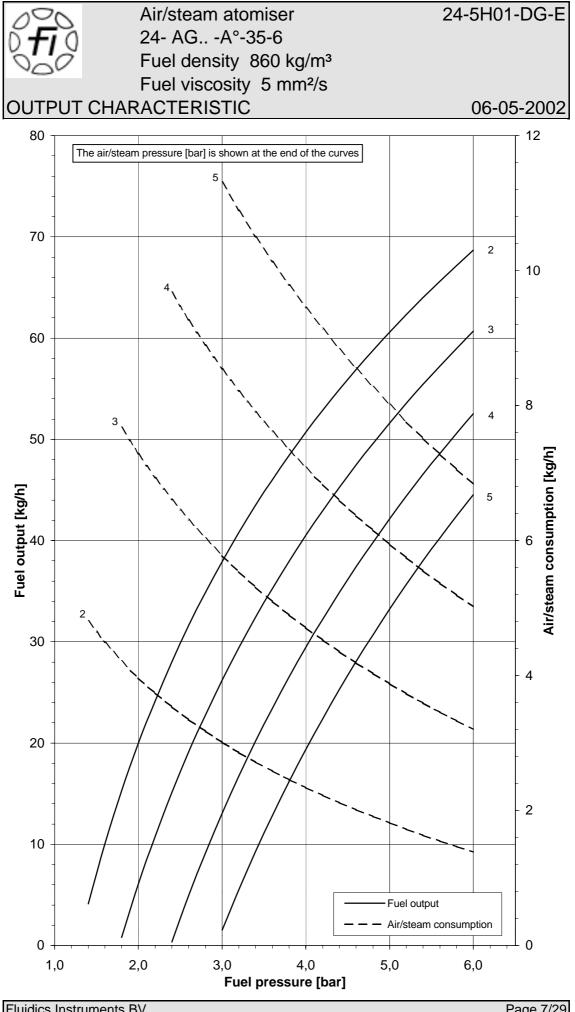

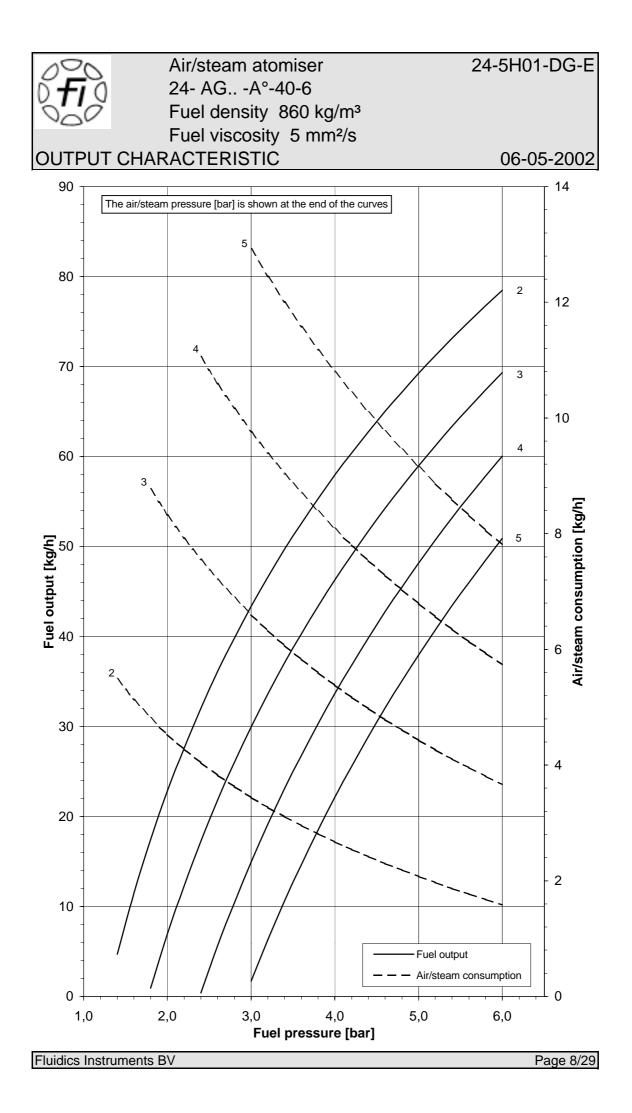


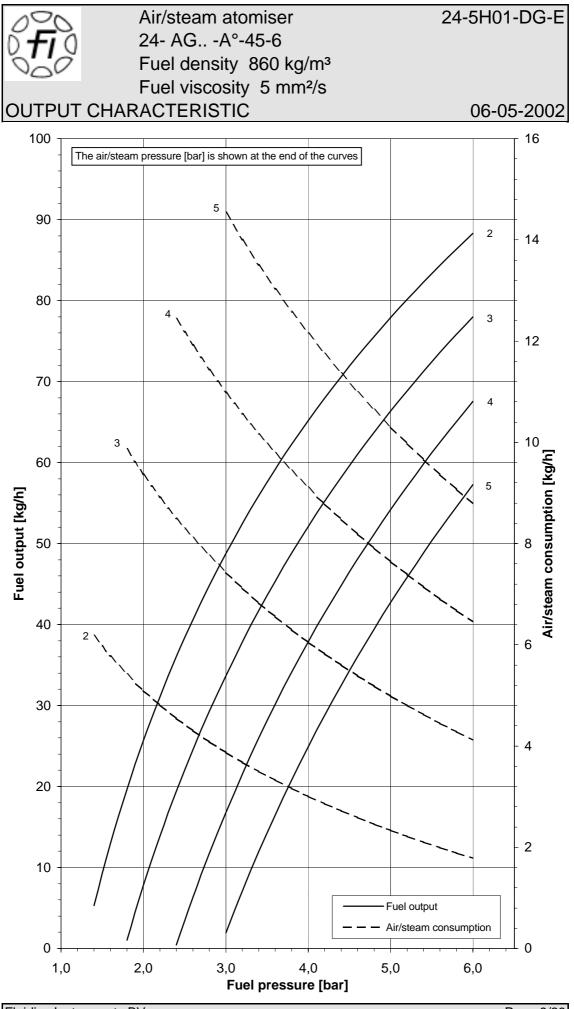








24-5H01-DG-E

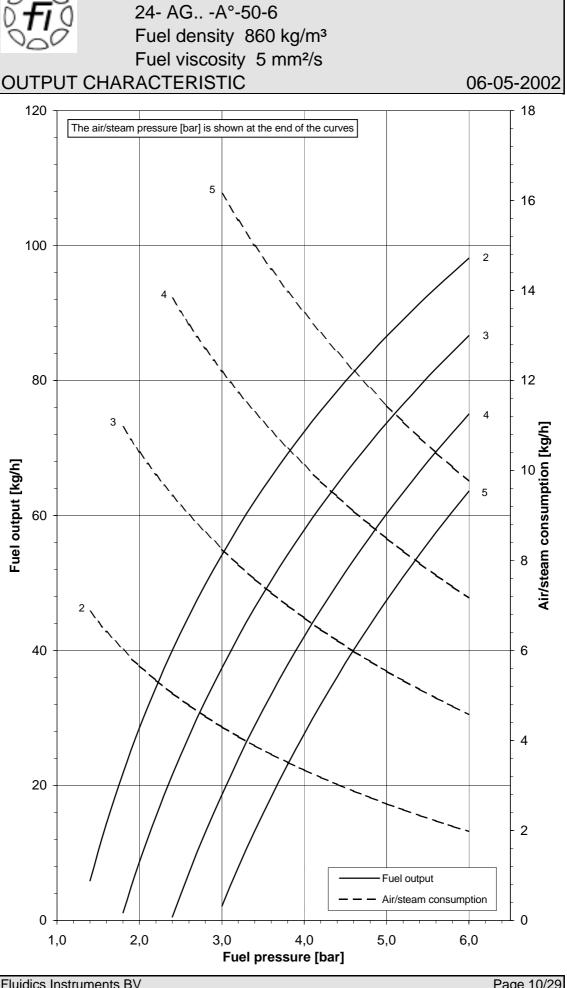



Air/steam atomiser

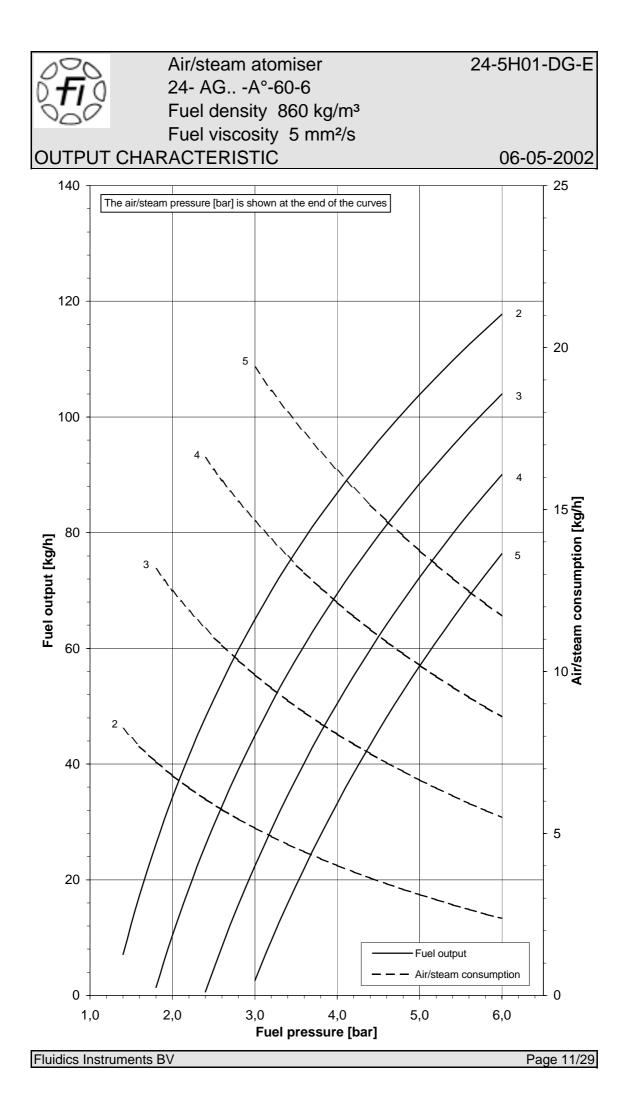


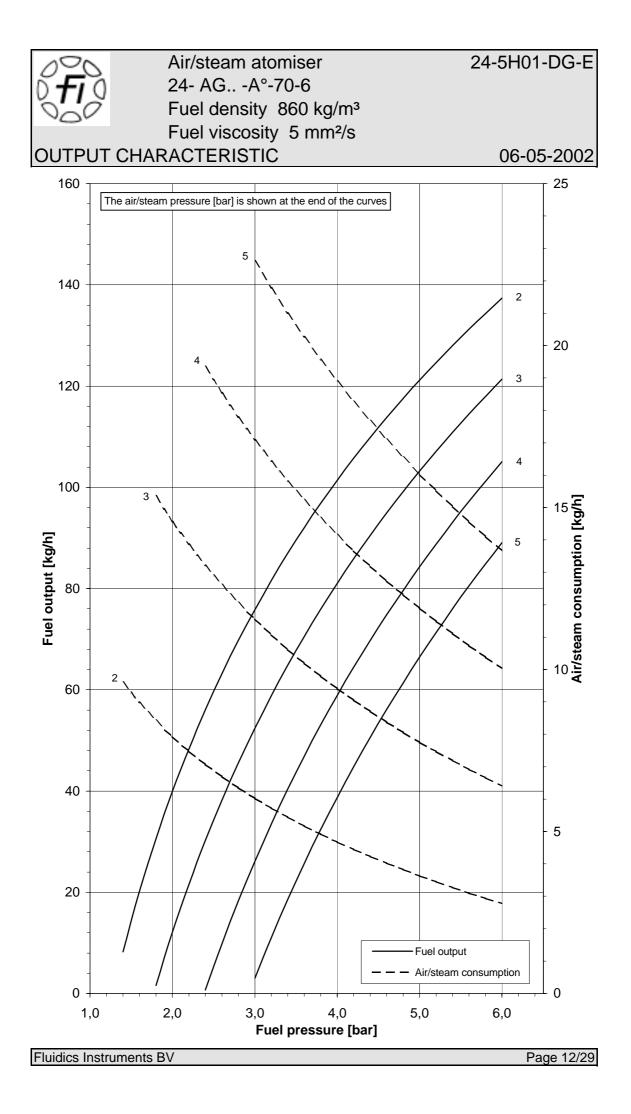


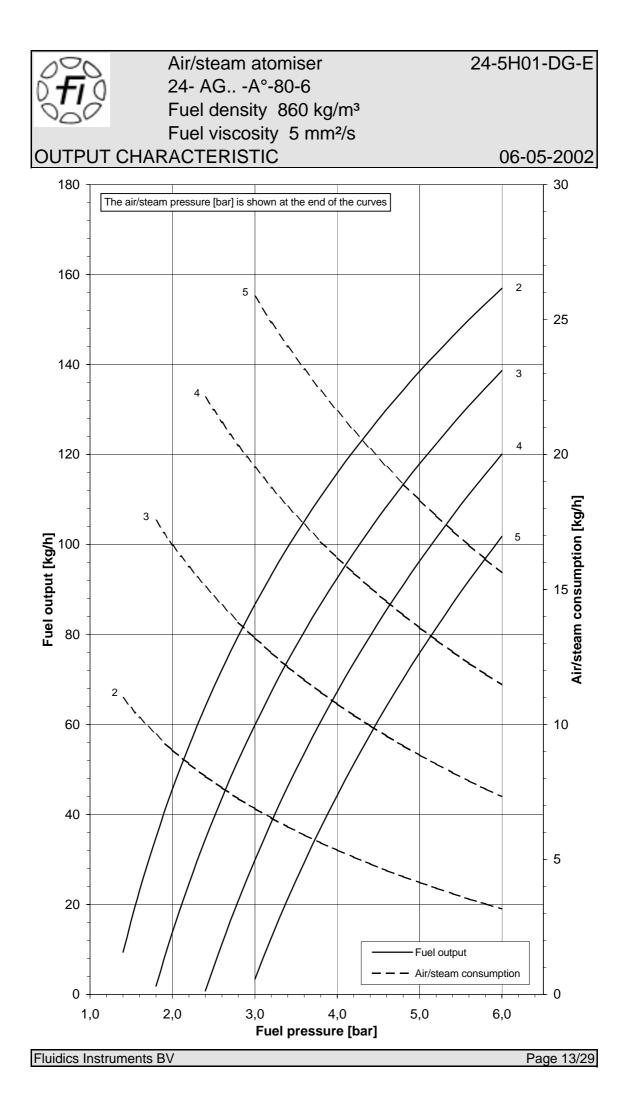


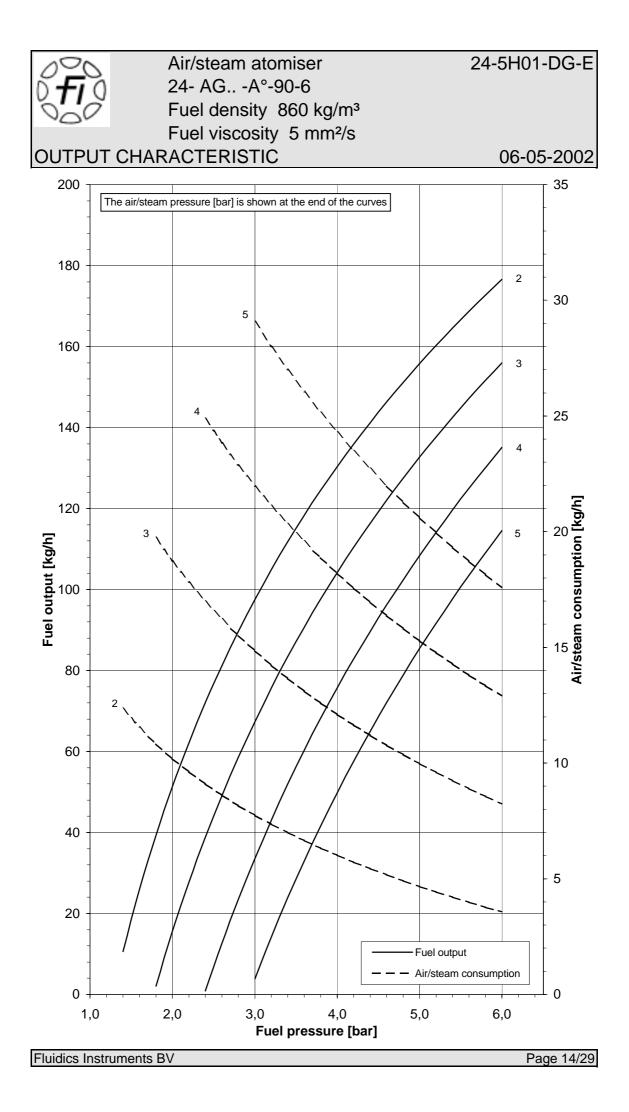


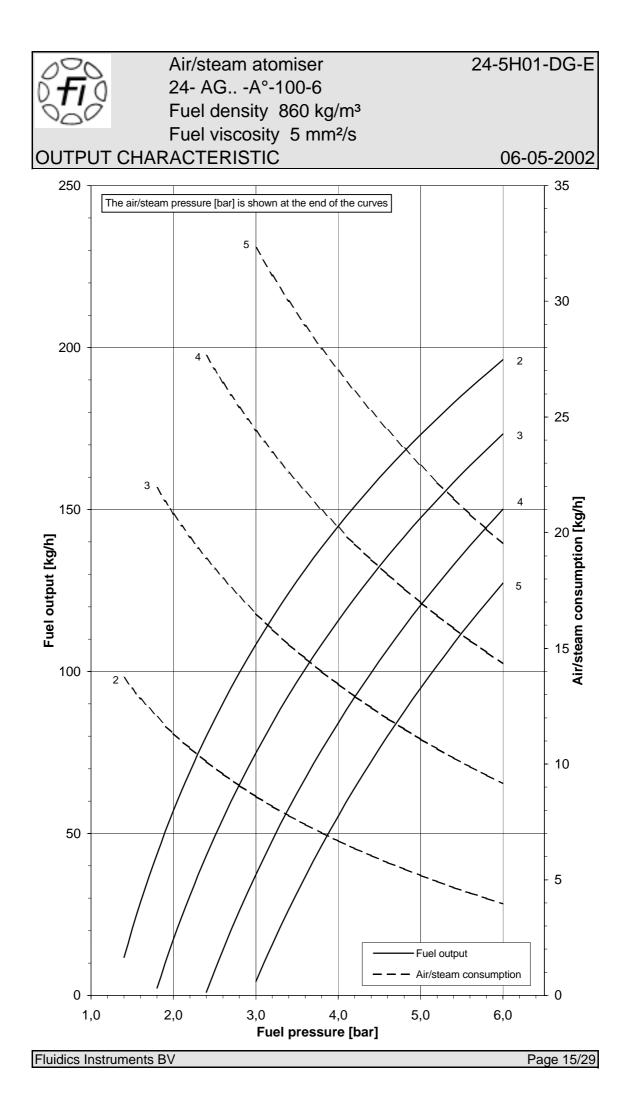


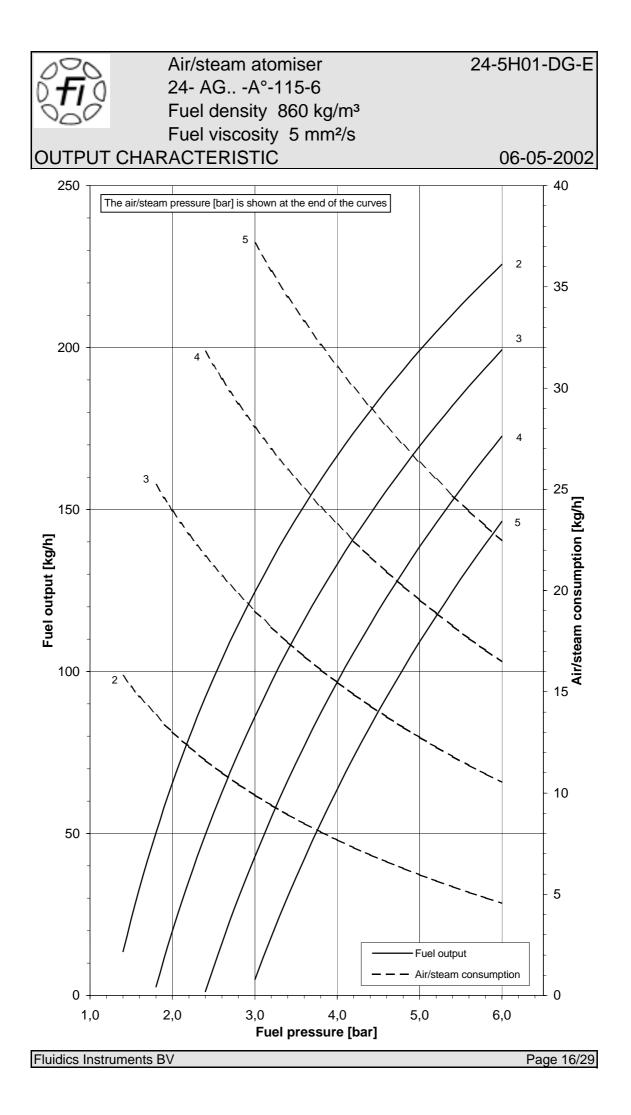


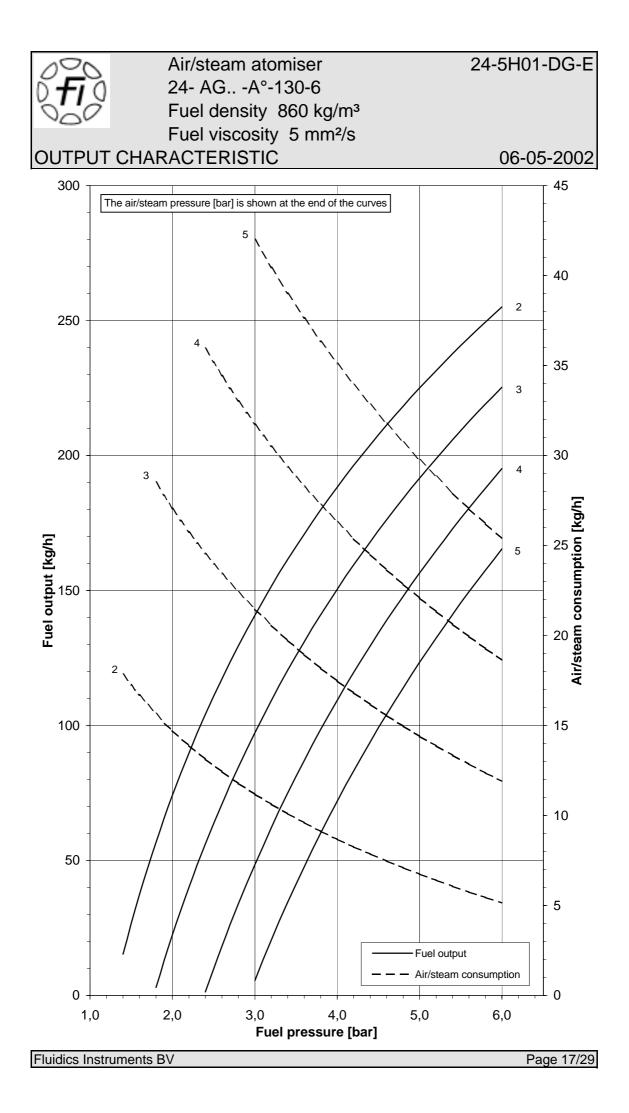


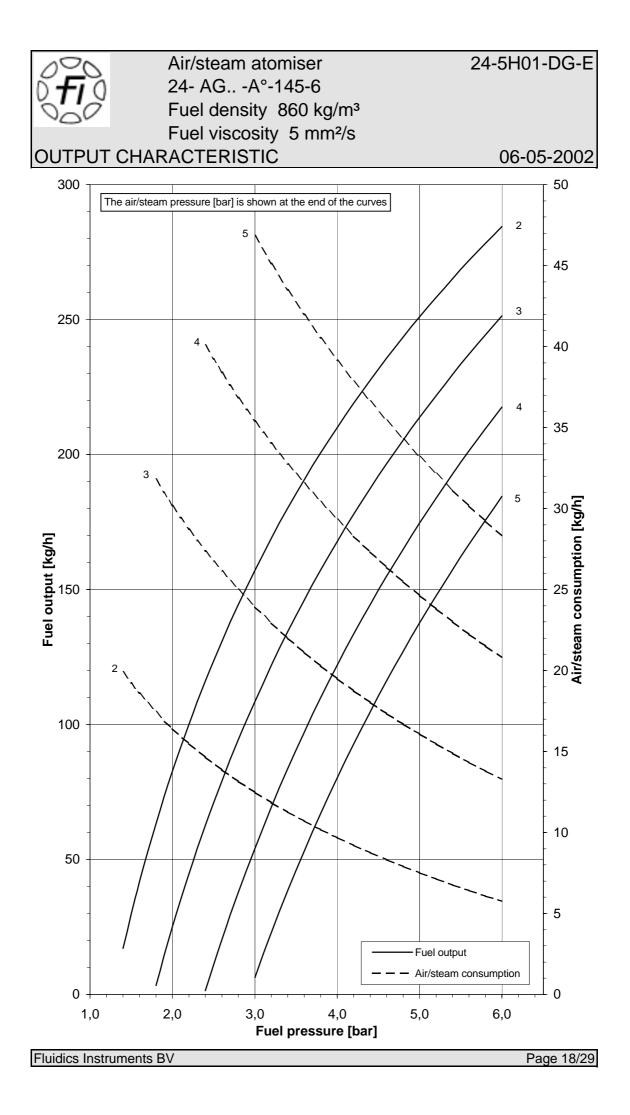

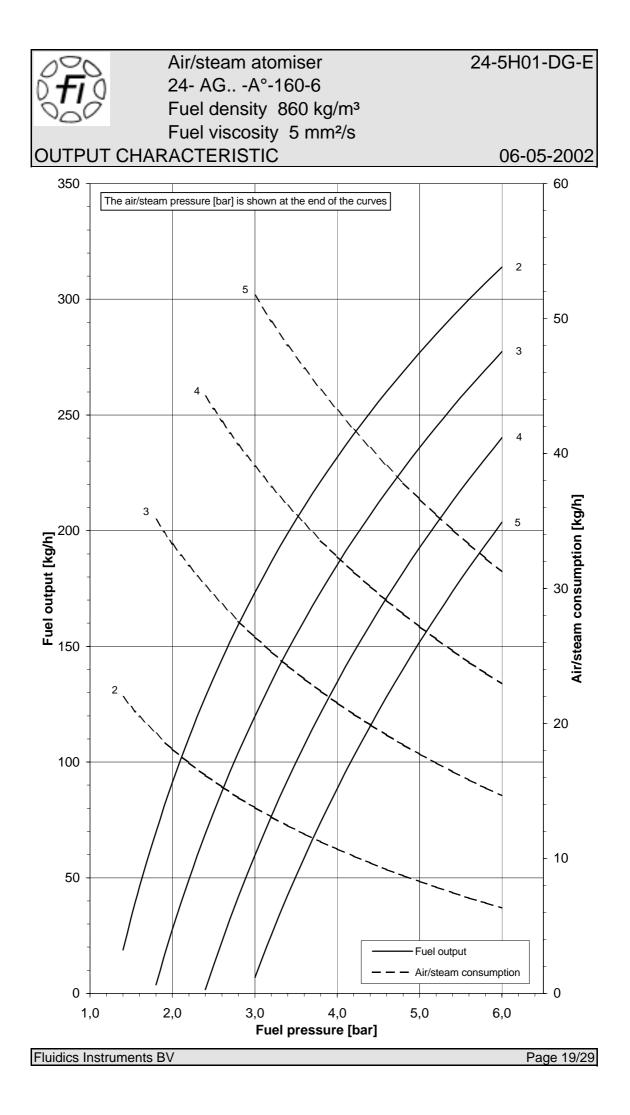

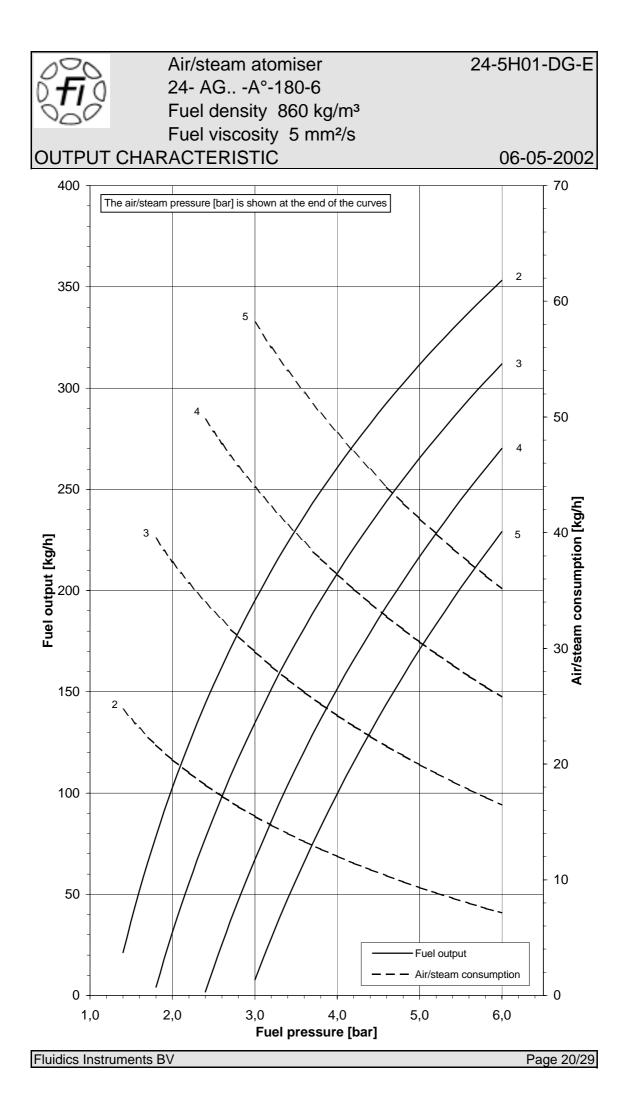

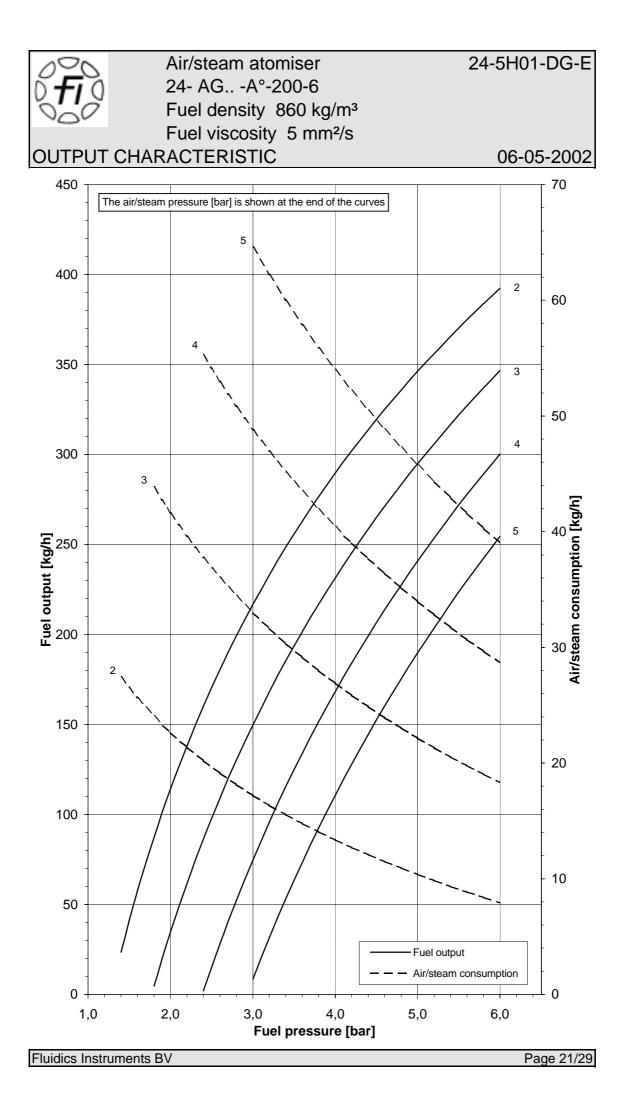

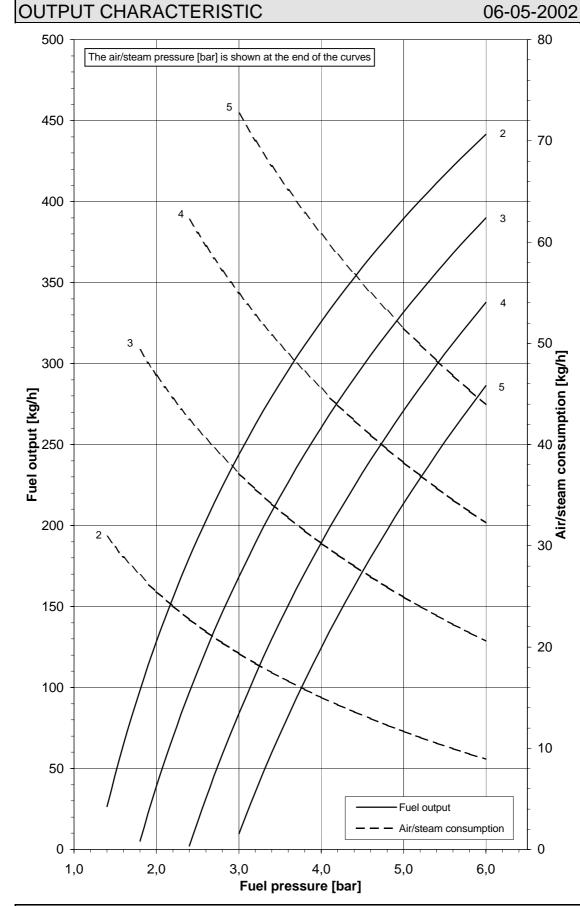

Air/steam atomiser 24- AG.. -A°-225-6

Fuel density 860 kg/m³ Fuel viscosity 5 mm²/s

0

24-5H01-DG-E

80

70


60

50


00 Air/steam consumption [kg/h]


20

10






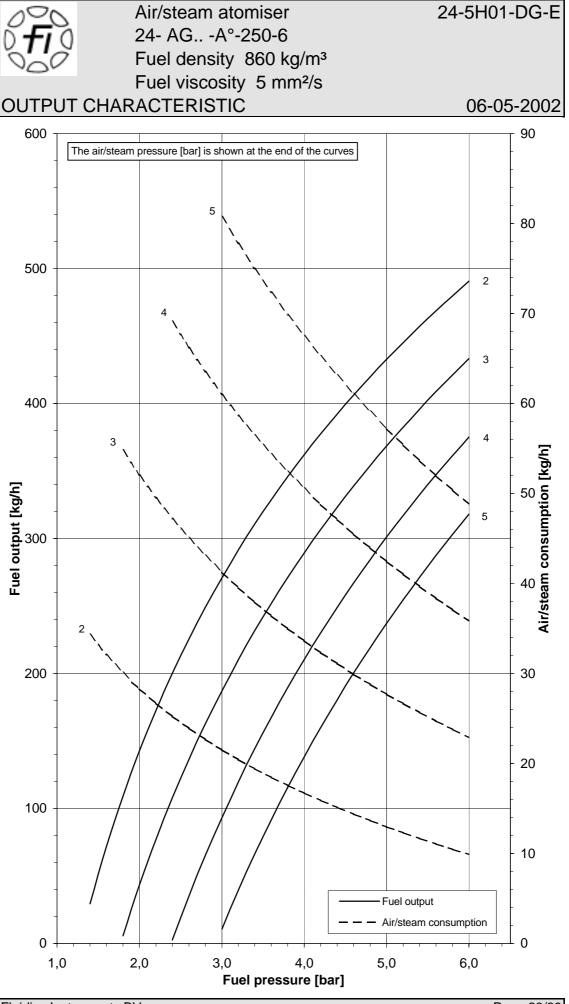


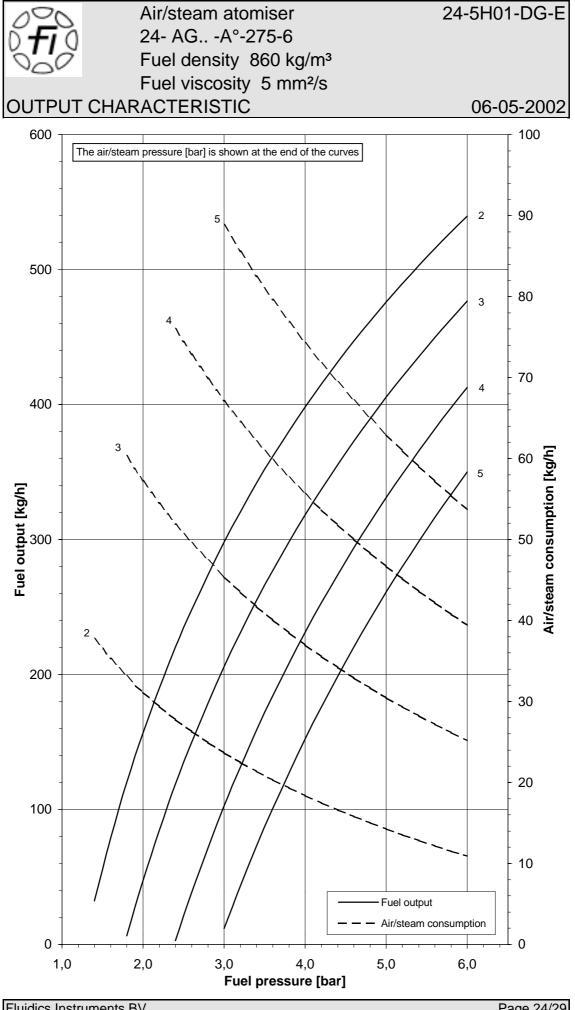



Fluidics Instruments BV

Page 24/29

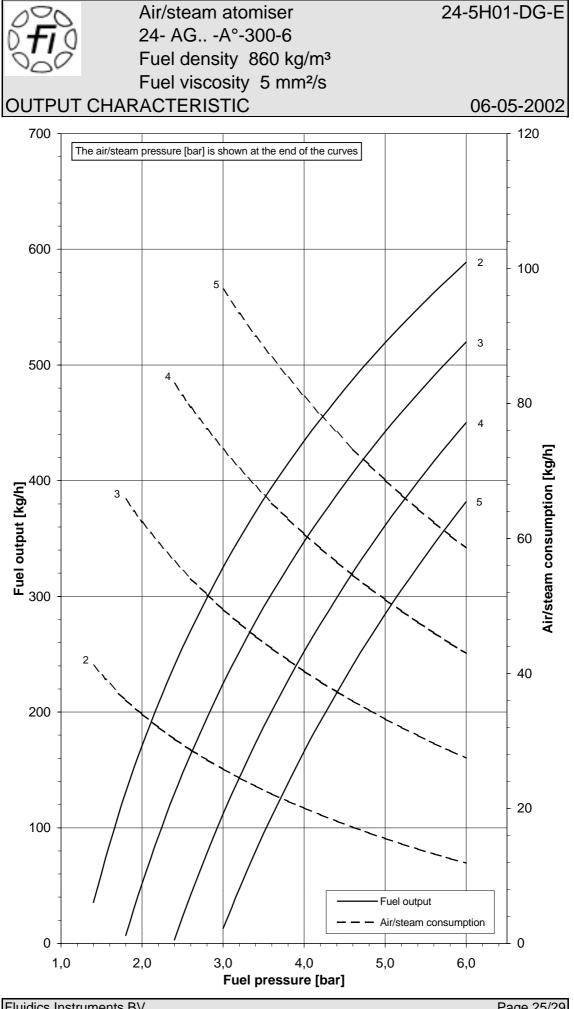

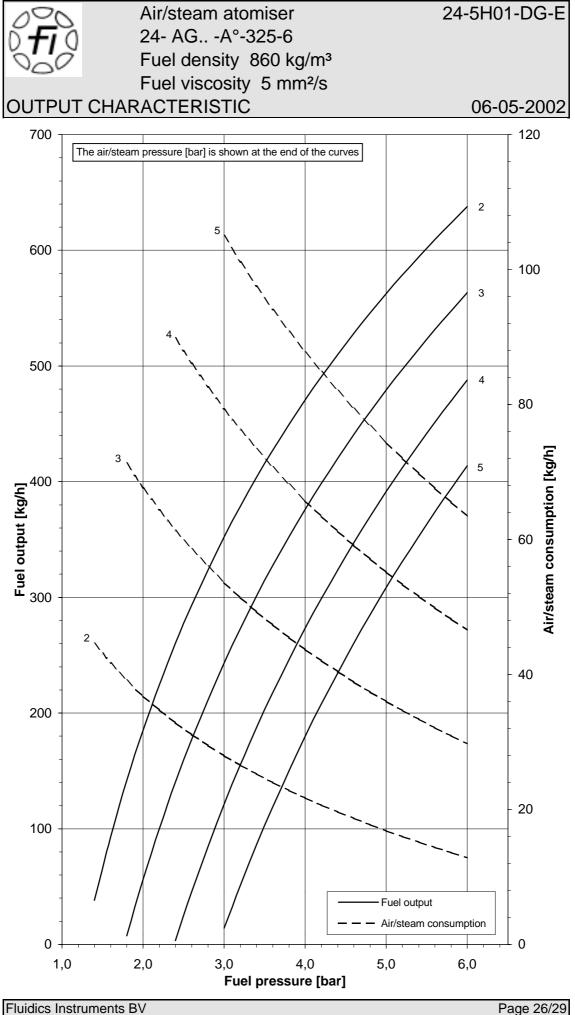

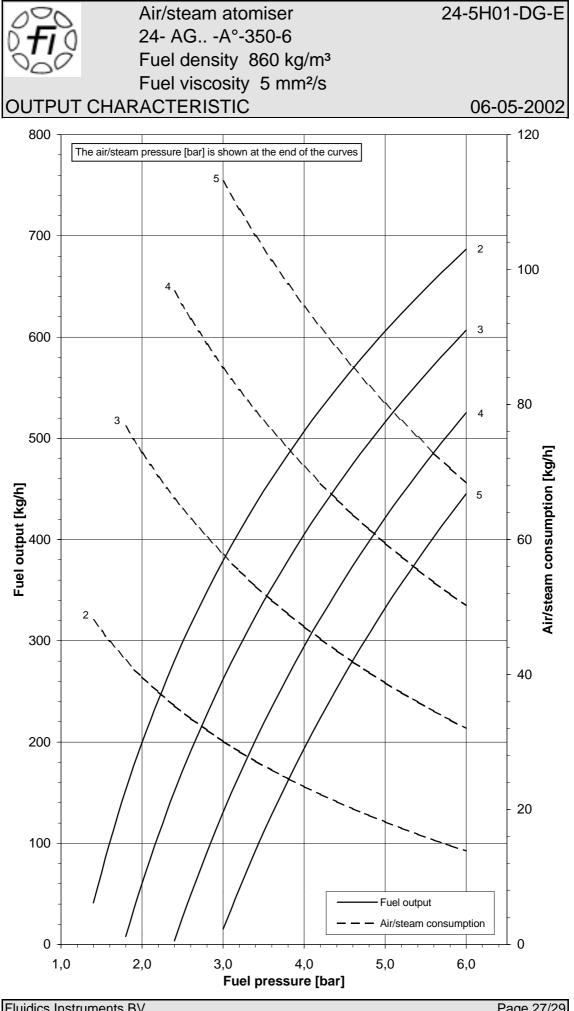

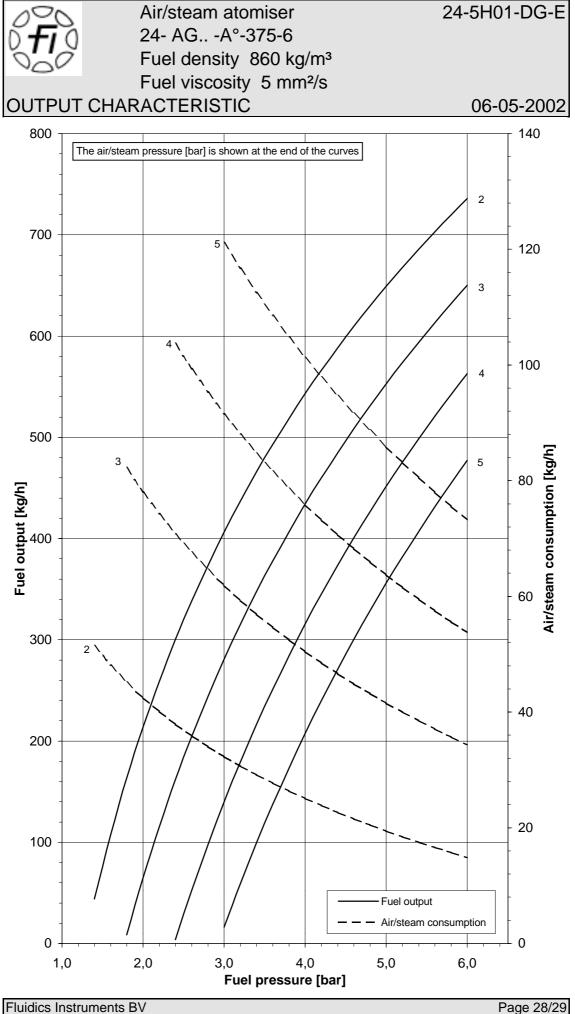

Page 28/29

